


## M100-PC9™ Cover Tape

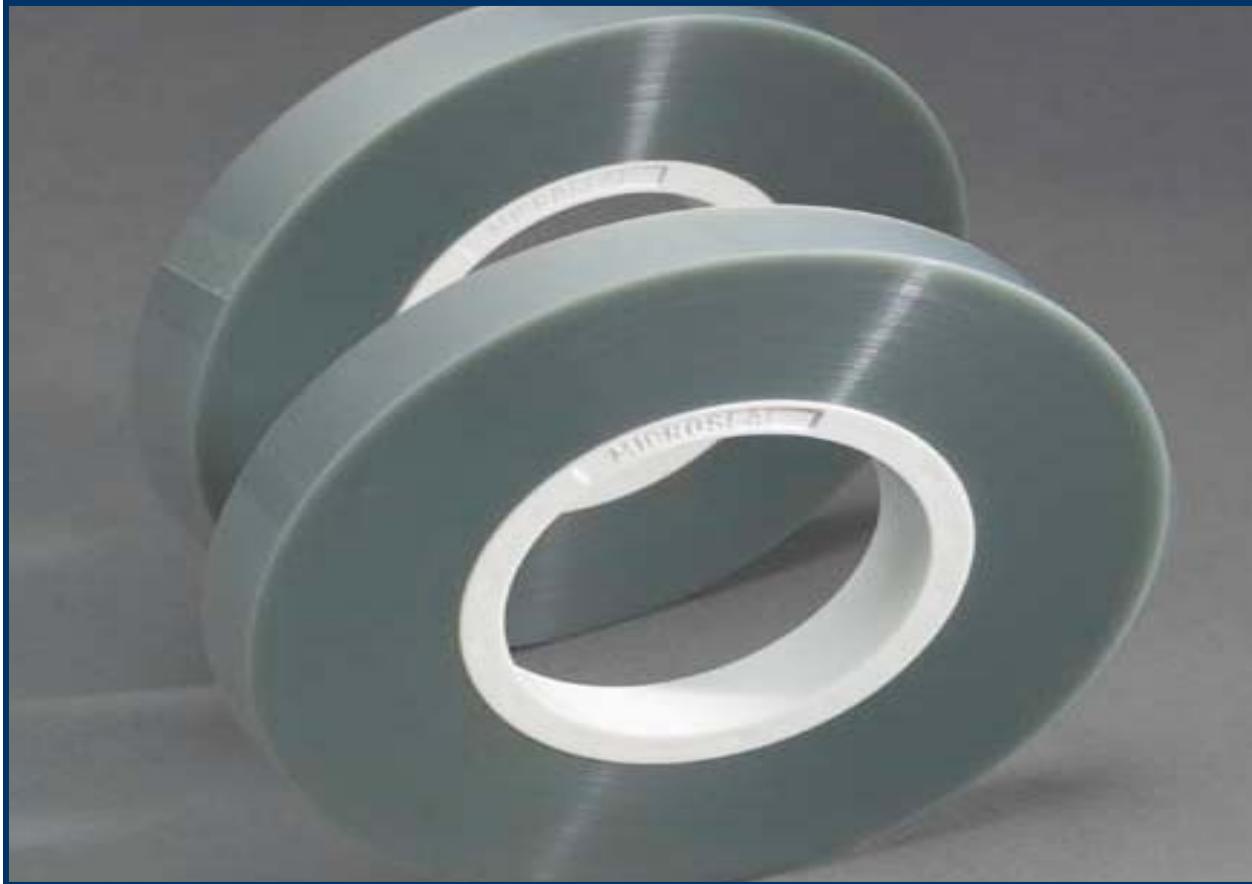

### **Description**

A clear, anti-static, heat activatable cover tape for use with **all** carrier tapes regardless of chemical base. **M100-PC9™** is designed to adhere at various temperatures and dwell times within industry standards.

### **Dimensions**

**M100-PC9™** Cover Tape is wound on a 3" plastic core in all standard widths. Splice free rolls are available in 300 or 500 meter lengths. Custom widths are available upon request.

### **Storage**


Store at controlled room temperature 19° C to 40° C (66° F to 104° F).  
Relative Humidity 50 ± 30%. Best if used within 24 months. Avoid excessive heat.

## M100-PC9™ Cover Tape



### Recommended Sealing Conditions

Temperature Range ..... 190° - 210° C  
 Dwell Time ..... 0.1 - 1.0 seconds  
 Shoe Width ..... 0.015 - 0.020 inches  
 Pressure ..... 30 psi

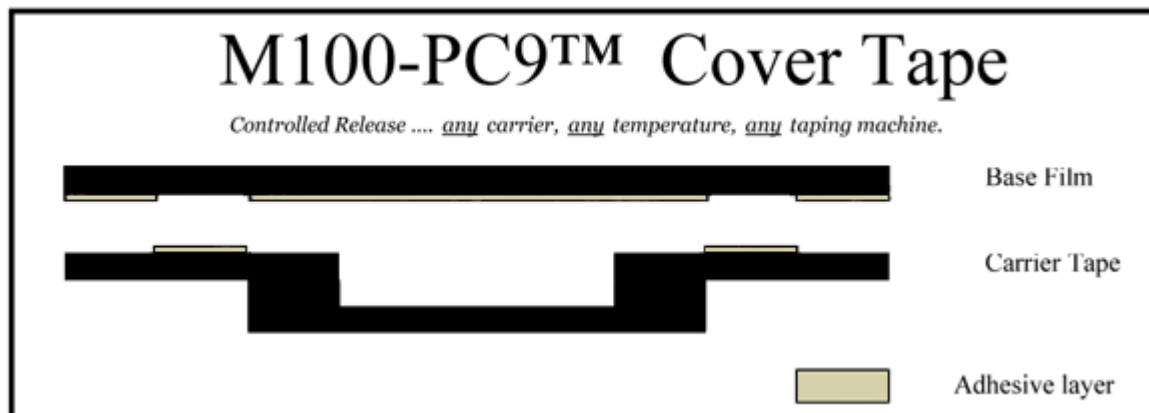

Properties	Value	Test method
Surface Resistivity	<10E12 ≥ 10E5 Ohms/square (Both sides)	ASTM D-257
Tribo - Electric charge generation, adhesive tape pull test Static Decay 5kv	Less than 50 volts Less than .1 seconds	EIA - 541 Mil B-81705
<b>Clarity</b> Luminous Transmittance Haze Clarity	93 % 27 % 72 %	ASTM D1003
<b>Strength</b> Tensile Strength MD Elongation at Break MD	11,000 psi 120-140 %	ASTM D882A ASTM D882A
<b>Peel</b>	50gms +/-20	EIA 481B